

AD 419: Composite beams with different positions of web openings

SCI publication P355 is widely used to design beams with large web openings. It is adopted in the development of software to design hot rolled and fabricated steel sections with openings of various shapes and sizes.

The purpose of this Advisory Desk note is to address some common practical problems related to adjacent openings of different heights and positions.

1. Unequal adjacent opening heights

In P355 and in the AD 418, the buckling length of the web post for buckling between closely spaced openings on the same horizontal axis is given by:

$$\ell_w = 0.7(h_o^2 + s_o^2)^{0.5} \leq h_o \quad \text{for rectangular openings} \quad (1)$$

$$\ell_w = 0.5(h_o^2 + s_o^2)^{0.5} \leq 0.7h_o \quad \text{for circular or elongated openings} \quad (2)$$

where:

h_o is the opening height (or average height, as defined below)

s_o is the edge-to-edge distance between the openings

For unequal adjacent opening heights, it is proposed that the average height of the openings, $h_{o,eff}$, may be used to determine the slenderness for web post buckling with a lower limit of 0.75 of the larger opening height. This corresponds to the smaller opening height being taken as not less than half the larger opening height. Therefore, the effective opening height, $h_{o,eff}$ replaces h_o in the above equations and is taken as:

$$h_{o,eff} = 0.5(h_{o,1} + h_{o,2}) \geq 0.75 h_{o,1} \quad (3)$$

where:

$h_{o,1}$ is the height of the larger opening

$h_{o,2}$ is the height of the smaller opening

2. Different eccentricities of adjacent openings

The eccentricity of the opening, e_o , is defined as positive when the centre line of the opening is above the centre line of the beam and negative when it is below. For the checks on web-post buckling, the effective opening height in the above equations for web-post buckling should include the worst case of the difference in eccentricities, which is as follows:

$$h_{o,eff} = 0.5(h_{o,1} + h_{o,2}) + |e_{o,1} - e_{o,2}| \geq 0.75 h_{o,1} + |e_{o,1} - e_{o,2}| \quad (4)$$

where:

$|e_{o,1} - e_{o,2}|$ is taken as its absolute value, in which $e_{o,1}$ and $e_{o,2}$ can have different signs depending on the position of adjacent openings relative to the centre line of the beam and the heights of the adjacent openings are defined as above.

The use of the absolute value of $|e_{o,1} - e_{o,2}|$ is the worst case for checking web-post buckling. A more precise treatment that takes account of the buckling length is given below.

3. More precise treatment of eccentricities or unequal adjacent opening heights

For unequal adjacent opening heights and positions, the buckling length should be calculated from the dimension, ℓ which is the diagonal distance from the low edge of the opening in the High Shear Side (HSS) to the high

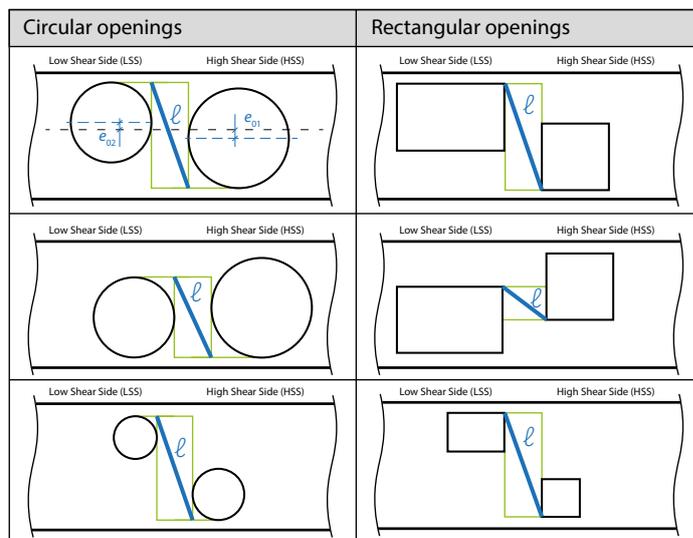


Figure 1: Treatment of the diagonal distance for web-post buckling between adjacent openings

edge of the opening at the Low Shear Side (LSS). Various cases are shown in Figure 1. The buckling length for web-post buckling is taken as:

For circular or elongated openings: $\ell_w = 0.5\ell$

For rectangular openings: $\ell_w = 0.7\ell$

For adjacent circular and rectangular openings: $\ell_w = 0.6\ell$

The dimension ℓ should be calculated by taking $h_{o,2} \geq 0.5h_{o,1}$ to be consistent with the limit in equation (4).

For adjacent rectangular openings, it is also necessary to check the in plane bending resistance of the web-post due to the horizontal force acting at the mid height of the beam. The position of the critical section will depend on the relative position of the openings in the beam depth. For simplicity, the in plane moment in the case of symmetric steel sections is determined from:

$$M_{wp,Ed} = 0.5(0.5(h_{o,1} + h_{o,2}) + e_{o,1} + e_{o,2}) V_{wp,Ed}$$

where:

$V_{wp,Ed}$ is the horizontal shear force acting at the mid height of the beam
This moment should not exceed the elastic bending resistance of the web post which is given by:

$$M_{wp,Ed} = t_w s_o^2 f_y / (6\gamma_{M0})$$

where:

s_o is the edge to edge spacing of the openings

t_w is the web thickness

f_y is the yield strength of the steel

Contact: Prof Mark Lawson

Tel: 01344 636555

Email: advisory@steel-sci.com